

GV GRAND WOOD
— F L O O R —




100% REACH Phthalate free
(except recycled content)



100% RECYCLABLE
35% recycled content



TVOC Emissions below detection level
(TVOC < 100 micrograms/m³ after 28 days)
No formaldehyde

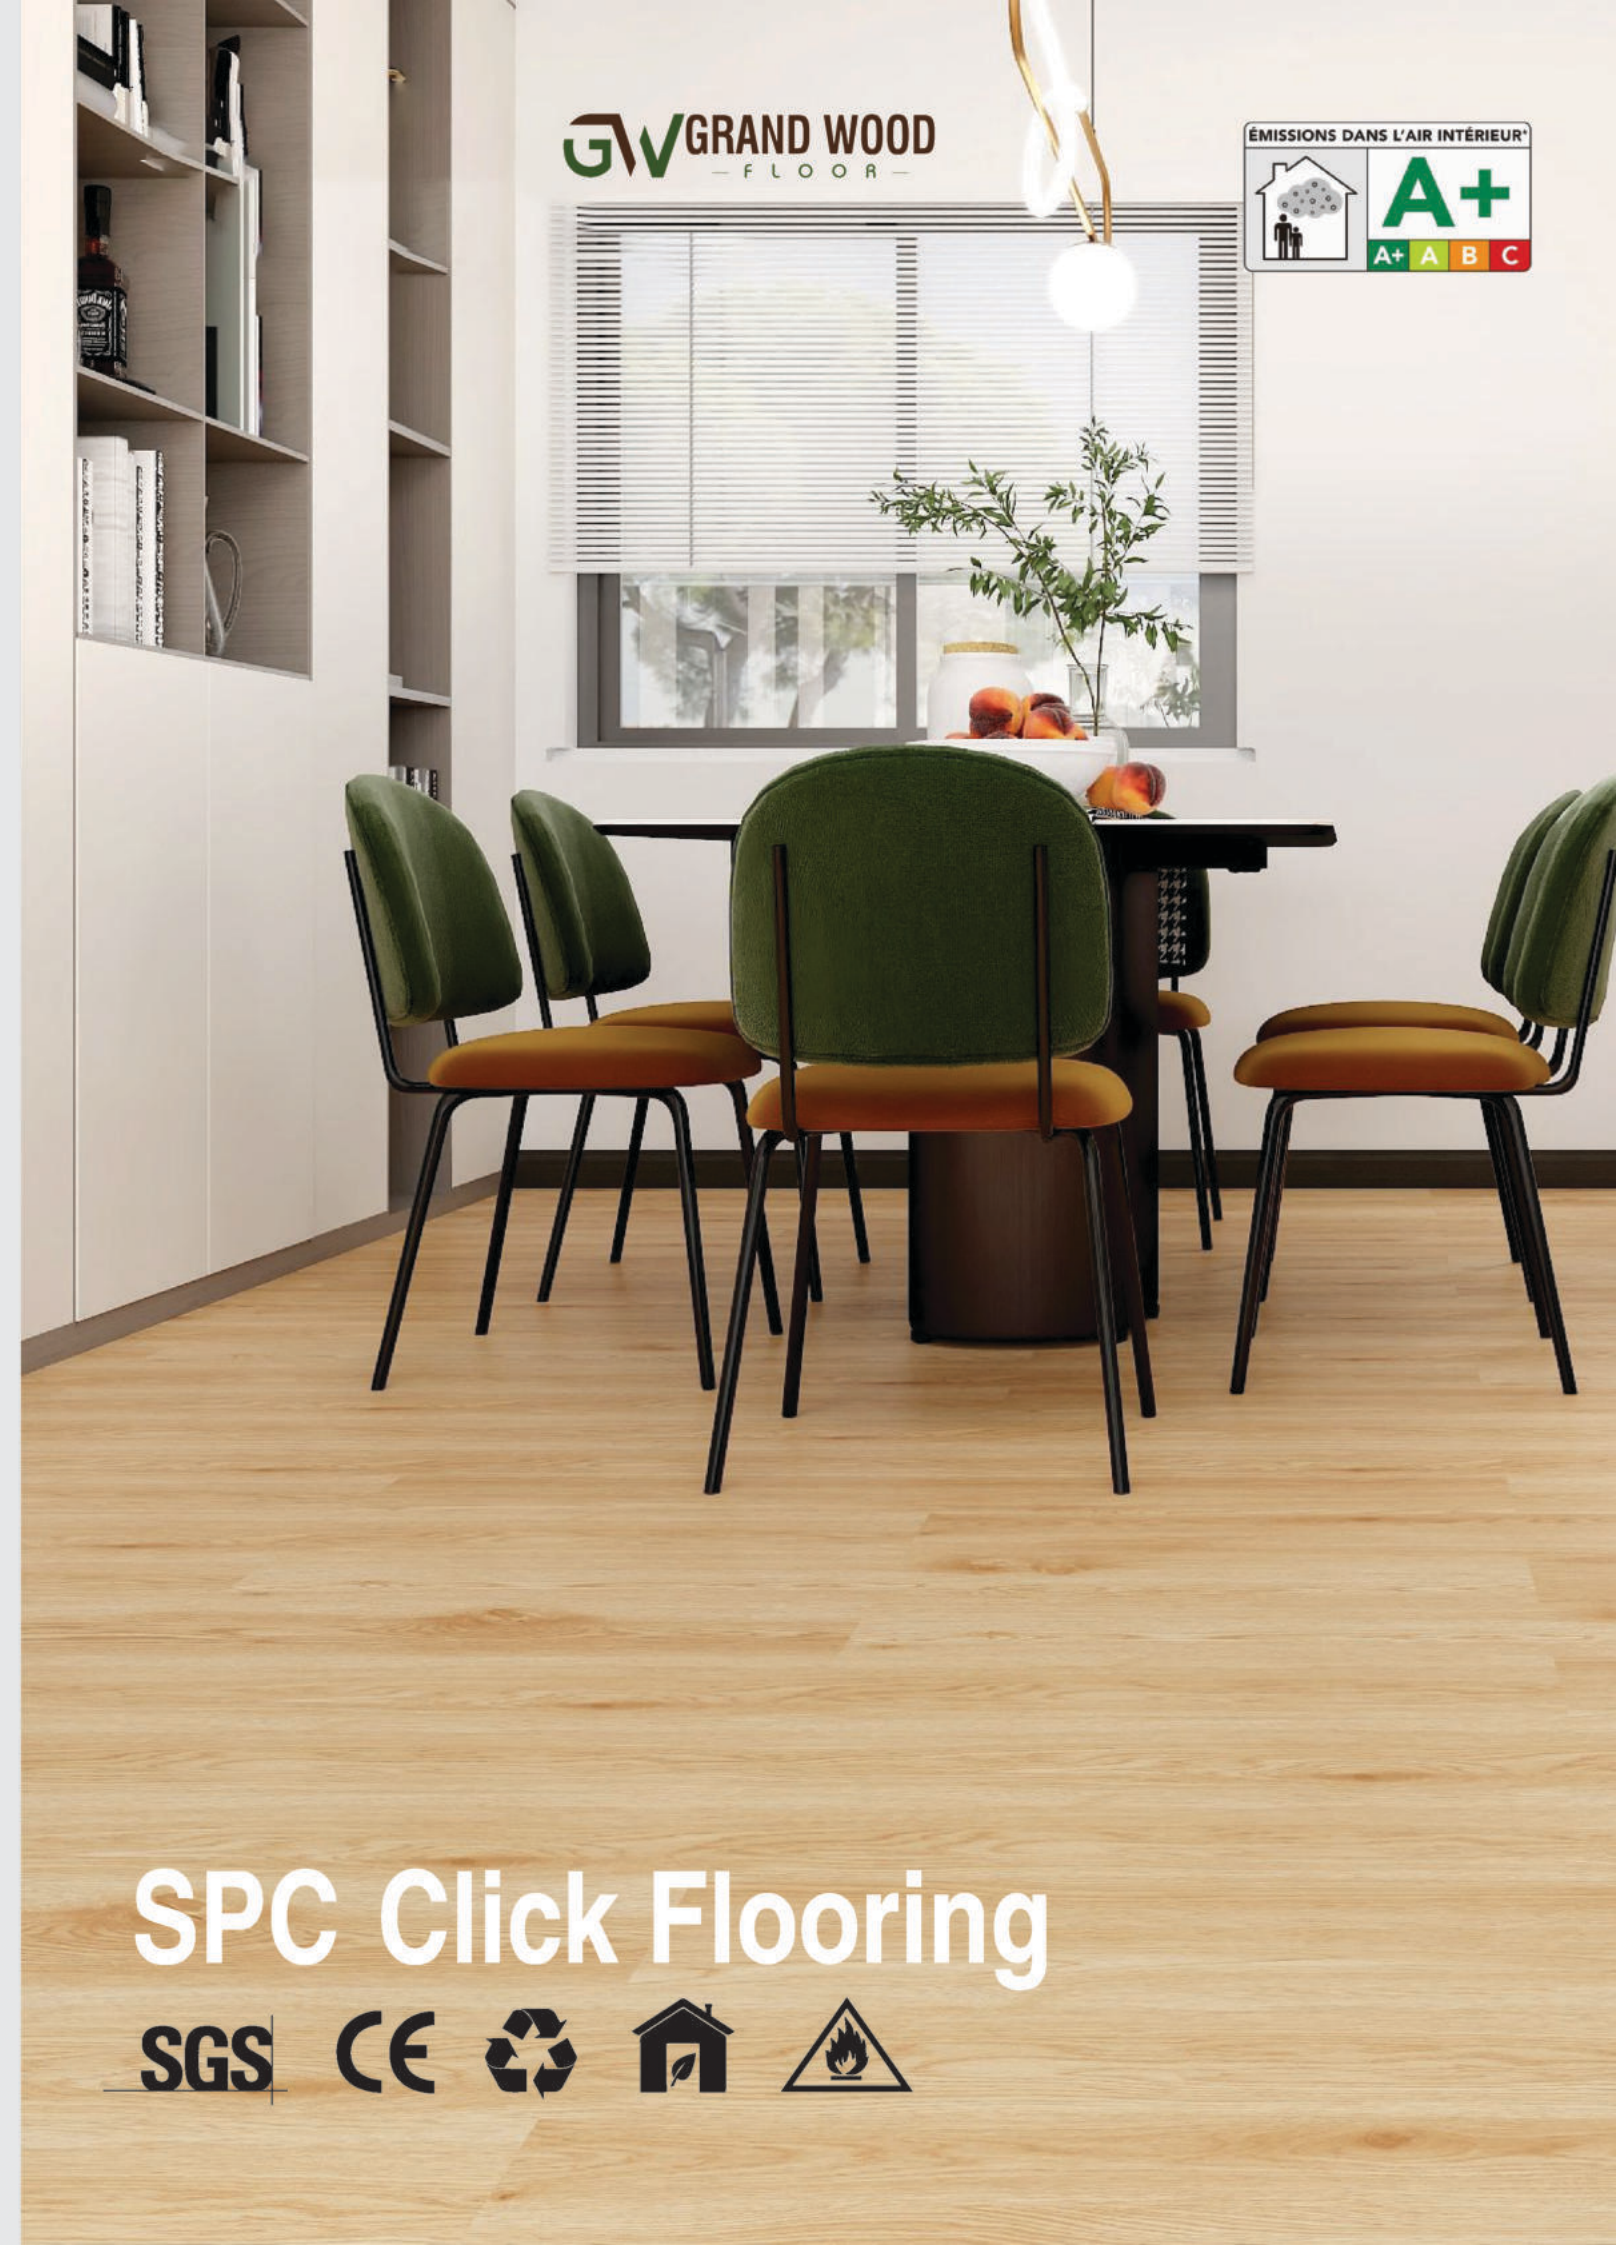

GV GRAND WOOD
— F L O O R —



SPC Click Flooring

SGS





Creating a green home

International test reports for greater peace of mind

 info@grandwood.vn

 [grandwoodfloor](https://www.linkedin.com/company/grandwoodfloor)

 www.grandwood.vn

 107 Duong so 1, KDC Duong Hong,
Binh Hung, Binh Chanh, TP.HCM

UV layer



Waterproof and moisture-proof



Anti-slip



Easy to clean

Wear Layer



Anti-scratch



Not easily burned



Wear-resistant and durable

Decor Film



Simulated wood grain texture,
realistic effect, solid wood touch

SPC Rigid Core



Anti Termit



Click Lock System



100% Virgin Materia

Advantages:

- 100% Virgin PVC Material
- Ultra Stronger Click Lock System
- Low Shrinkage & Expansion
- Easy Clean UV Coating

SPC structural layer

Anti-scratch UV Layer

Durable Wear Layer

High-definition Decor Film

Super Strong SPC Rigid Core

Unilin Click Lock

IXPE Underlay

Product Description

Characteristics	Standard	Unit	Result	Result
Classification				
Fire rating	EN 13501-1	Class	Bfl-s1	Bfl-s1
Static electrical	EN 1815	KV	<2	<2
Slip resistance wet	DIN 51130	Class	R10	R10
Performance				
Wear resistance	EN 660.2	mm³	≤2. 0	≤2. 0
Wear group	NF 189	group	PASS	PASS
Type Binder content	ISO 10582	group	I	I
Impact Sound Insulation	EN ISO 717-2	dB	4	4
Dimensional Stability	EN ISO 23999 (EN434)	%	≤0. 12	≤0. 12
Residual Indentation	EN ISO 24343-1(EN434)	mm	≤0.1	≤0.1
Castor Chair Test	ISO 4918 (EN425)	-	OK	OK
Thermal Conductivity	EN ISO 10456 (En12 524)	W/(m.K)	0.25	0.25
Color fastness	EN 20 105 - B02	Degree	≥6	≥6
Surface treatment		-	UV coating	UV coating
Chemical resistance	EN ISO 16000-6 (EN423)	-	OK	OK
Environment / Indoor air quality				
Tvoc	EN ISO 16000-6 (EN423)	ug/m³	<10	<10
 For flooring subject to intensive use in commercial premises  For intensively used living areas  				

Available sizes


	
1230*230mm	1220*180mm
	
1500*228mm	900*600mm
	
1545*228mm	600*300mm

Product Information :

Size: 180*1220mm; 230*1220mm;150*935mm(Customized)
Wear Layer: 0.2/0.3/0.5/0.7mm

Thickness: 4/4.2/5/6/7/8mm(Customized)
Underlay: IXPE (1mm,1.5mm, 2mm)

WIDELY USED IN A VARIETY OF PLACES

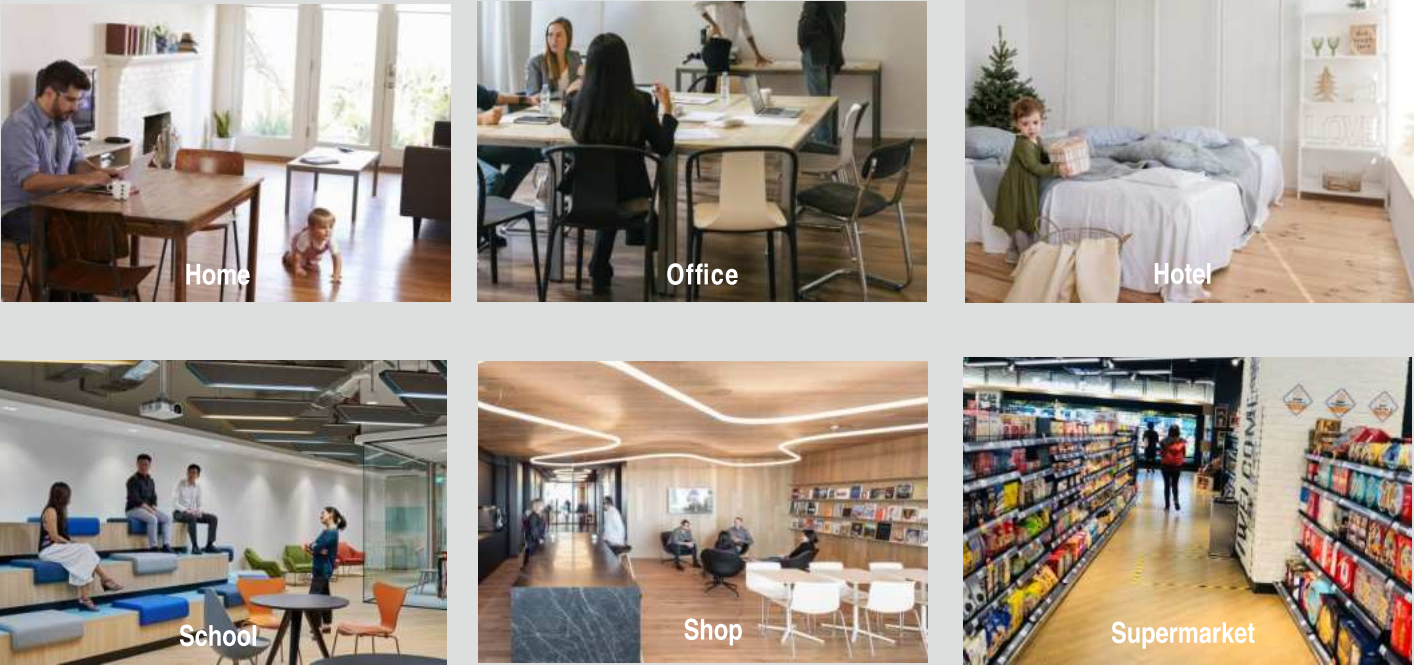

HP-SPC-13

**GREEN HOME ENVIRONMENTAL PROTECTION
ZERO FORMALDEHYDE**

- ◆ One shot, locking fast installation, alone can also be easily installed, save energy and effort, moreSave installation cost.
- ◆ Quiet noise reduction, green health quality, care for the safety of the whole family, paving can be moved in, no formaldehyde damage.
- ◆ B1 level national standard certification, has a good flame retardant effect, even in the open fire and high temperatureit is difficult to catch fire even under open flame and high temperature, and supports floor heating.
- ◆ Waterproof and anti-slip, lotus leaf principle, water dripping on the floor into a bead does not penetrate, solve the mold breedingit can solve the problem of mold, termite, moth, etc.





Wood Series

Size: 150*935 mm
180*1220 mm

Thickness: 3.5/4.0/4.2/5.0/6.0mm

Wear layer : 0.2/0.3/0.5mm



HP-SPC-01



HP-SPC-02



HP-SPC-03



HP-SPC-04



HP-SPC-07



HP-SPC-08







HP-SPC-09



HP-SPC-11

HP-SPC-02

Locking design Quick installation



Size: 150*935 mm
180*1220 mm

Thickness: 3.5/4.0/4.2/5.0/6.0mm

Wear layer : 0.2/0.3/0.5mm



HP-SPC-13



HP-SPC-14



HP-SPC-15



HP-SPC-16



HP-SPC-26



HP-SPC-27



HP-SPC-28



HP-SPC-29



HP-SPC-15





Size: 150*935 mm
180*1220 mm

Thickness: 3.5/4.0/4.2/5.0/6.0mm

Wear layer: 0.2/0.3/0.5mm



HP-SPC-S1906



HP-SPC-S1909



HP-SPC-S1902



HP-SPC-S1910



HP-SPC-G3035



HP-SPC-G3031



HP-SPC-G3032



HP-SPC-G3032



HP-SPC-S11



HP-SPC-G3037



HP-SPC-S14



HP-SPC-S12



HP-SPC-S16



HP-SPC-S15



HP-SPC-S2015



HP-SPC-S2011



HP-SPC-S2012



HP-SPC-S2013



HP-SPC-S2015



HP-SPC-S2017



HP-SPC-S2019

Size: 150*935 mm
180*1220 mm

Thickness: 3.5/4.0/4.2/5.0/6.0mm

Wear layer: 0.2/0.3/0.5mm



HP-SPC-S2013





HP-SPC-517



HP-SPC-517



HP-SPC-518



HP-SPC-519



HP-SPC-520



HP-SPC-521



HP-SPC-522

Size: 150*935 mm
180*1220 mm

Thickness: 3.5/4.0/4.2/5.0/6.0mm

Wear layer: 0.2/0.3/0.5mm



HP-SPC-522






HP-SPC-17

Stone Series



HP-SPC-17

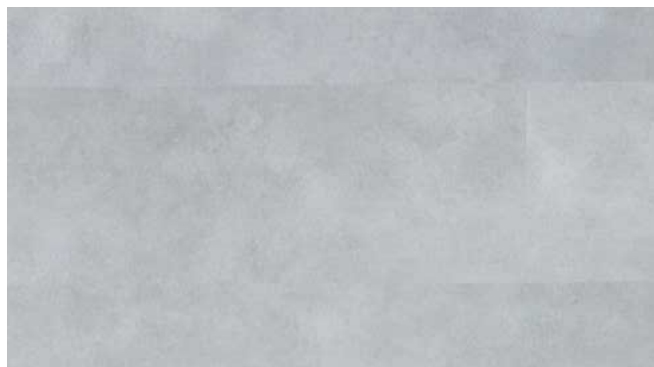

HP-SPC-18



HP-SPC-19



HP-SPC-20



HP-SPC-21



HP-SPC-22

Size: 150*935 mm
180*1220 mm

Thickness: 3.5/4.0/4.2/5.0/6.0mm

Wear layer: 0.2/0.3/0.5mm



HP-SPC-19

